

PRODUCT DATA SHEET

ISO-CONNECT OUTSIDE CX



PRODUCT DESCRIPTION

ISO-CONNECT OUTSIDE CX is a special foil sealant which is air tight and impermeable to driving rain for connecting joints on

- windows
- doors
- panels

in accordance to the new energy saving regulation (EnEV) requirements. It consists of a water vapour diffusion permeable synthetic fleece with a self-adhesive strip on one edge for a quick and effective application on window frames. After installation ISO-CONNECT OUTSIDE CX can be plastered over.

APPLICATION

ISO-CONNECT OUTSIDE CX is used to seal external connecting joints, for weather protection in areas where vapour diffusion permeability is required. It allows trapped moisture in building joints to escape, according to the RAL "installation guide", avoiding damage caused through condensation. ISO-CONNECT OUTSIDE CX is highly flexible, which aids exact application, particularly around corners. It also allows the optimum bonding of wet plaster, render etc. (without the need of a primer), and is extremely suitable as a base for thermal insulation materials applied to external facades.

PRODUCT ADVANTAGES

- fulfils the EnEV (energy saving regulations) requirements
- air tight, wind proof and water vapour permeable
- driving rain and water resistant
- special fleece surface which is good for plastering, painting or pasting over
- with a self-adhesive strip for quick and effective installation
- highly flexible, but with a high tensile strength for an easy and exact application

SERVICE

- standard sizes available from stock
- private label and / or special labelling available
- competent experienced technical support available in the field and by phone



ISO-CONNECT OUTSIDE CX

Technical data	Standard	Classification
Material description		vapour diffusion permeable synthetic fleece
Colour		white
Weight		200 – 250g/m ²
Impermeable to driving rain	DIN EN 1027	no water penetration up to 1,050 Pa
Air permeability coefficient	DIN EN 1026	$\alpha \ll 0.1$ (no measurable air penetration)
Temperature stability range	internal	approx. -40°C to +100°C
sd-value	DIN EN ISO 12572	approx. 0.05 m
Flexibility at -23°C	internal	no breaks, no tears
Fire behaviour	DIN EN 13501	E
Dimension tolerance	DIN 7715 T5 P3	requirements fulfilled
Shelf life		1 year, dry and in original packing
Storage temperature		+1 °C to +20°C

PROCESSING

The bonding surfaces must be firm, dry, clean from dust, stripping agents, solvents, oil and fat. When sealing windows, panels and door frames remove backing from the self-adhesive strip, then lay the foil onto the surface and press securely. ISO-CONNECT OUTSIDE CX can be applied in the factory.

For the wall applications ISO-TOP FLEX-ADHESIVE SP or SP+ is used. Normal rough, e.g. uneven wall surfaces, can be compensated for through the application of a sufficient amount of adhesive. Use sufficient adhesive so that after applying the foil the adhesive caterpillar is at least 30mm wide and 1 mm thick. On areas that are to be plastered over a continuous "Z" shaped caterpillar should be applied over the area. Overlapping of the foil ends should only be up to 50mm wide using the same technique. Plastering can be done as soon as the adhesive bond is enough to carry the plaster.

FINISHES


single side self-adhesive with 1 self-adhesive strip
special finishes available on request

DIMENSIONS

width: 70, 90, 145, 180, 235, 290mm

PACKAGING

rolls, roll length: 30m

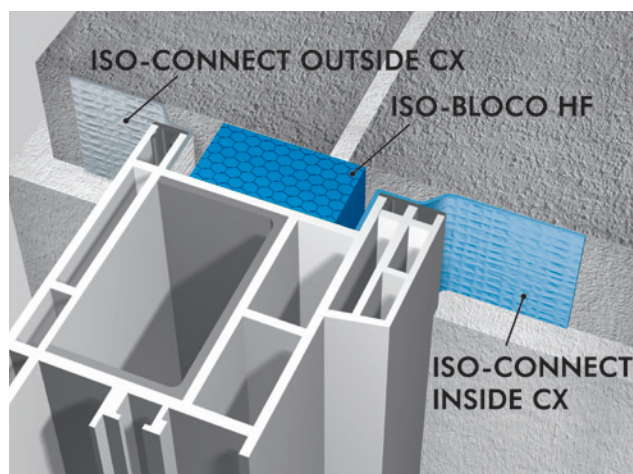

Installation example: ISO³-WINDOW SEALING SYSTEM